



# CSV25

VENEER EXTERIOR


TWO-WAY LOUDSPEAKER SYSTEM

## APPLICATIONS:

- Foreground/Background
- Theatres
- Clubs
- Houses of Worship
- Sporting Facilities
- Entertainment
- Industrial A/V

## FEATURES:

- High Sensitivity
- PowerSense™ Dynamic Driver Protection
- Simulated Oak Laminated Exterior

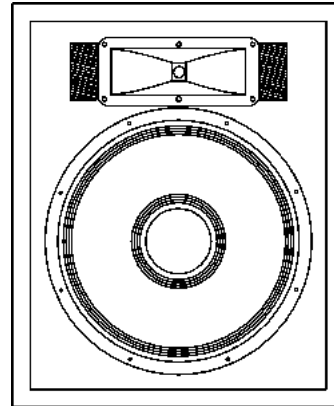

## DESCRIPTION

The CSV25™ is a rugged, high-sensitivity, two-way, full-range loudspeaker system. The system utilizes one PZT high-frequency driver coupled to an exponential horn and one 12" woofer for high sensitivity and excellent power handling capability. These components are matched to an optimally tuned direct radiating bass-reflex enclosure. The system's small size and attractive simulated oak exterior make it perfect for unobtrusive permanent installation applications.

The CSV25 offers a robust internal PowerSense Dynamic Driver Protection crossover. The PowerSense crossover is built to last with high quality inductors and military grade circuit boards. The proprietary PowerSense DDP™ protection circuit provides both over current and thermal protection for added performance and reliability.

Designed as a stand-alone full-range loudspeaker system, the CSV25 offers enough bass for most foreground/background and speech reinforcement applications. For more demanding applications, extended bass can be achieved by adding a CSX -S2 subwoofer.

Mounting is easily accomplished utilizing threaded inserts provided and optional mounting kits.

## SPECIFICATIONS

### Loudspeaker Type:

Two-Way, Full-Range, Bass-Reflex System

**Frequency Response:** 70-18,000 Hz

**Power Handling:** 100W RMS 250W Program

**Recommended Amp:** 200W - 300W @ 8 Ohms

**Sensitivity at 1W/1M:** 97.5 dB

**Nominal Dispersion:** 90° x 60° (HxV)

**Nominal Impedance:** 8 ohms

**Crossover Frequency:** 3,000 Hz

### Drivers:

One PZT on an Exponential Horn

One 12" Woofer

**Speaker Protection:** PowerSense DDP

### Input Connections:

Dual Neutrik Speakon in parallel

Dual 1/4" phone jacks in parallel

### Enclosure Material:

Simulated Oak Laminate covered high density particle board

### Dimensions:

Height: 18.25 inches (464 mm)

Width: 15 inches (381 mm)

Depth: 13.5 inches (343 mm)

**Weight:** 38.5 lbs. (17.5 kg.)


**Shipping Weight:** 43 lbs. (19.5 kg.)




# CSV 25

VENEER EXTERIOR  
TWO-WAY LOUDSPEAKER SYSTEM


## FREQUENCY RESPONSE

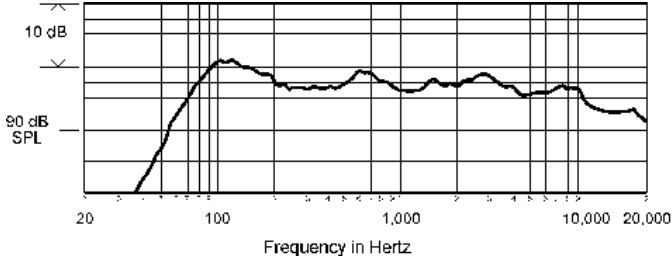

## IMPEDANCE

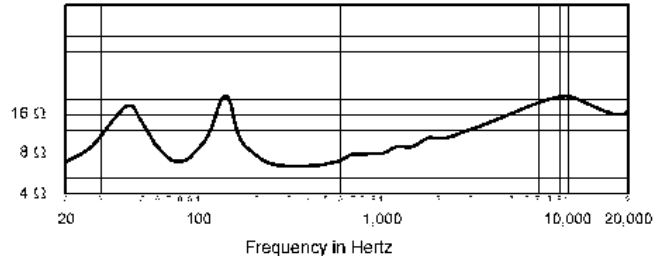

## DIMENSIONS

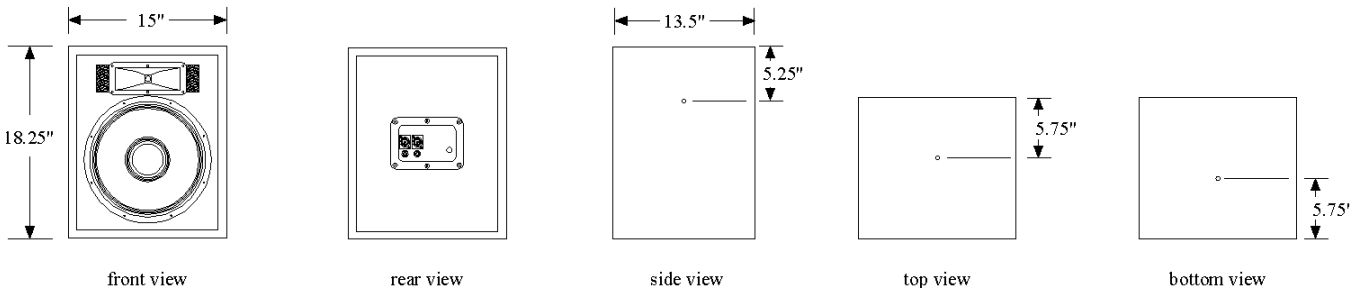

## ARCHITECTS' AND ENGINEERS' SPECIFICATION

The loudspeaker system shall be a direct-radiating, bass-reflex design with one 12" woofer and one PZT driver coupled to an exponential horn. All components shall be connected to an integral crossover/protector. The crossover/protector shall be a two-way design with 12 dB/octave low pass at 3,000 Hz to the woofer and 12 dB/octave high-pass at 3,000 to the high-frequency driver. The crossover shall utilize high quality inductors and high positive current coefficient resistors (HPCCR's) for component protection. The loudspeaker enclosure shall have an internal volume of 1.4 cu. ft. (38.9 L) and be constructed of dense, well braced stock covered in simulated oak laminate. The system shall meet the following performance criteria: Amplitude response of 70 Hz to 18,000 Hz +/- 5 dB, 100W RMS power handling, 97.5 dB sensitivity at 1 meter with one watt applied. Coverage pattern shall be 90° x 60° (HxV). Dimensions shall be 18.25" (464 mm) high, 15" (381 mm) wide, 13.5" (343 mm) deep, and weigh 38.5 lbs. (17.5 kg). The system impedance shall be 8 ohms nominal.

## LIMITED WARRANTY

Community loudspeaker systems are guaranteed to be free from defects in materials and workmanship for a period of five years from the date of sale to the original purchaser. This warranty does not apply to products which have been subjected to abuse, accident, modification, improper handling/installation, or repairs made without factory authorization or by other than an authorized Community Field Service Station. Items or products covered by this warranty will be repaired or replaced, at the option of Community, without charge for materials or labor, provided products are returned prepaid for inspection to the Community factory in Chester, PA.

Specifications subject to change without notice.

CSV25 Page 2 of 2

**COMMUNITY PROFESSIONAL LOUDSPEAKERS**

333 East Fifth Street Chester, PA 19013-4511 USA Phone (610) 876-3400 Fax (610) 874-0190

CV25-991020