




E200-SAK

ENTASYS 200 Stand Adapter Kit

Stand Adapter Kit for Community ENTASYS 200 Series Loudspeakers

The E200-SAK Stand Adapter Kit is specifically designed for the Community ENTASYS 200 Series column loudspeakers to provide a high degree of flexibility and portability for AV professionals. It is engineered for use with models ENT203, ENT206, ENT212 and ENT220.

By attaching the E200-SAK accessory to the rear of the ENTASYS 200 enclosure, both a stand mount and a convenient carrying handle are created. The stand mount fitting accepts 1 3/8" diameter loudspeaker support stands.

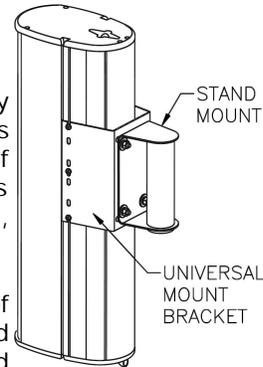


The E200-SAK accessory comes pre-assembled. (the kit includes the Stand Mount pre-attached to a Universal Mount Bracket using M6x30mm buttonhead machine screws, lock washers, and flat washers). A quantity of six (6) M3.5 x 16 Philips Truss Head Sheet Metal Screws are provided for attaching the bracket to the ENTASYS 200 loudspeaker enclosure; no additional hardware or components are provided. The Stand Mount is constructed of zinc plated, powder coated steel. The Universal Mount Bracket is dual-layer powder coated steel.

Available in black and white. Order part no. E200-SAKB to receive a black universal mount bracket attached to a black stand mount. Order part no. E200-SAKW to receive a white universal mount bracket attached to a black stand mount.



When mounting the ENTASYS 200 loudspeaker onto a speaker stand using the E200-SAK accessory, the loudspeaker enclosure should always be positioned directly above one of the stand's tripod legs for maximum support. It is the sole responsibility of the user and/or AV provider to ensure that the assembly is mounted safely on a tripod stand or mounting pole, with enough support or weight at the base to adequately support the aggregate weight of the loudspeaker assembly.

E200-SAK Assembly

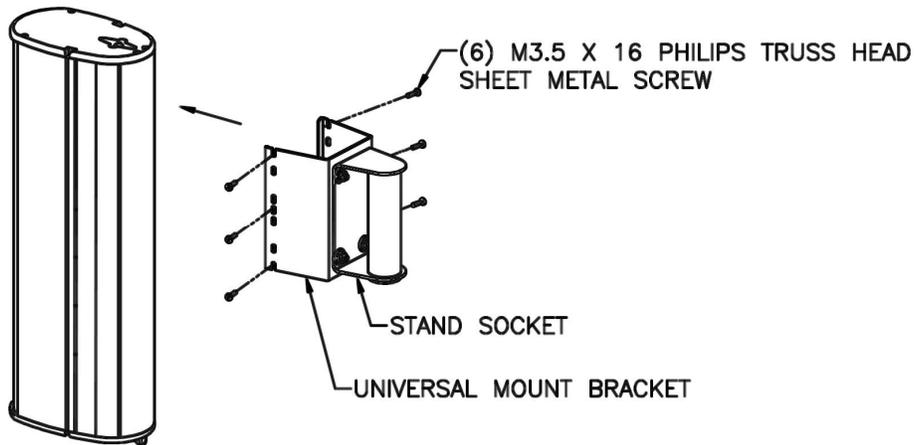

E200-SAK Assembly Instructions

1. The E200-SAK accessory comes with the STAND MOUNT pre-attached to the UNIVERSAL MOUNT BRACKET as shown above. Check to make sure the machine screws are fastened securely and/or tighten if necessary.
2. Slide the E200-SAK accessory onto the loudspeaker column to the desired position, using the slots along the side of the enclosure.
3. Install and tighten six (6) 3.5 x 16mm Philips truss-head deep thread screws into the reinforced slots in the enclosure, three on each side of the loudspeaker enclosure. Note: Pilot holes are factory-suggested mounting positions but the bracket may be mounted at any position along the length of the column as needed to suit a particular application.



Community Professional Loudspeakers
333 East Fifth Street, Chester, PA 19013 USA
Phone (610) 876-3400 | Fax (610) 874-0190
www.communitypro.com